

PRODUCT CODE

FOIL-xxx-xxx // FOIL- area covered - voltage

PRODUCT DESCRIPTION

The Cut & Turn Foil panel by Warmup is an ultra thin electric radiant floor heating system designed for use under laminate, carpet, engineered wood and other floating floors. It can be conveniently installed under the floor finish in both dry and wet areas without the need for additional earth grids.



FEATURES


- Installs between the insulation pad and the floor
- Grounded flat aluminum foil won't raise floor levels.
- Great for heating under floating floors such as laminate and engineered wood

SPECIFICATIONS

Operating voltage	208V & 240V
Cable thickness	1/8" (3 mm)
Inner insulation	Advanced fluoropolymer (ETFE)
Heating cable spacing	2" (50mm)
Output rating	12 W/sq ft
Cold Tail length	10ft (3m)
Connections	3-core grounded cord attached
Approvals	cULus



APPLICATION

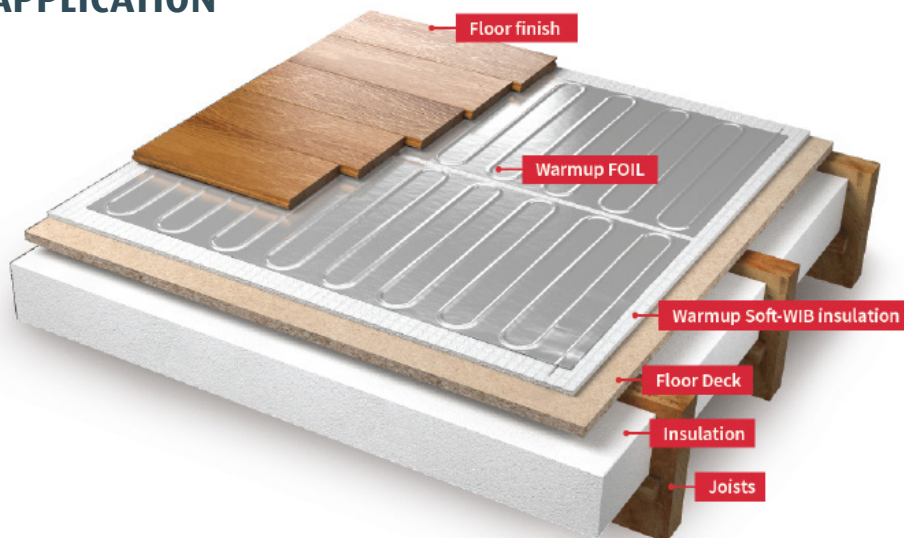

PRODUCT LISTING

Covers area of (sqft)	Code	Size (ft)	Wattage (W)	Amps (A)	Resistance (Ω)
20	FOIL-20-240	1.8W x 12.2L	240	1.0	240
25	FOIL-25-240	1.8W x 15.3L	300	1.3	192
40	FOIL-40-240	1.8W x 24.5L	480	2.0	120
50	FOIL-50-240	1.8W x 30.6L	600	2.5	96
60	FOIL-60-240	1.8W x 36.7L	720	3.0	80
70	FOIL-70-240	1.8W x 42.8L	840	3.5	69
95	FOIL-95-240	1.8W x 57.1L	1140	4.8	51
115	FOIL-115-240	1.8W x 70.1L	1380	5.8	42
130	FOIL-130-240	1.8W x 79.3L	1560	6.5	37
140	FOIL-140-240	1.8W x 85.4L	1680	7.0	34

WARRANTY & MAINTENANCE

When installed according to the installation manual, the FOIL is covered with Warmup's 10-year manufacturer warranty.

TECHNICAL SUPPORT



Warmup is available 24/7/365 at (888) 927-6333.

For quotes, layouts and specific technical information, contact us at:

Warmup USA

(888) 927-6333

ussales@warmup.com

Warmup CANADA

(888) 592-7687

ca@warmup.com

RELATED PRODUCTS

- 4iE® Smart WiFi thermostat - see WSC-0926
- Tempo® programmable thermostat - see WSC-1102
- Insulated Underlay (WIU) - see WSC-0305
- Aluminum Tape (TAPE-AL)