

Warmup

The world's best-selling floor heating brand™

Easy Setup Guide
warmupedia.warmup.com

4iE® Programmable, Touch-Screen Thermostat

Smarten your Floors



Please visit www.warmup.com (US) and www.warmup.ca (CAN) for videos, specification sheets and complete wiring and mounting instructions.

Veillez visiter www.warmup.com (États-Unis) ou www.warmup.ca (Canada) afin de trouver les vidéos d'installation, fiches techniques, guides de câblage complets et instructions de montage.

Por favor, visite www.warmup.com (Estados Unidos) o www.warmup.ca (Canadá) para los videos de instalación, hojas de datos, guías de cableado e instrucciones de instalación.



- (1) **Language** - Set your language preference
- (2) **Heater Type**
Electric floor
 The power settings have to be entered. Voltage is defaulted to 120V and the power is the total wattage of the heaters which the 4iE is controlling. The wattage ratings of the heaters can be found in the heater manual or online at warmup.com or warmup.ca

Hydronic floor
 The power settings have to be entered. If you do not know the efficiency percentage and kW rating of your hydronic system, please consult your installer
- (3) **Set time** - Set the current time
- (4) **Set date** - Set the current date
- (5) **Set daylight savings** - Set Europe, N.America, Australia or switch off
- (6) **Temperature format** - Set the format as degrees Celsius or Fahrenheit
- (7) **Home screen style** - Set your home screen style
- (8) **Background image** - Set your background style
- (9) **Display brightness** - Set the display and standby brightness
- (10) **Audio feedback** - To turn the touch sounds when making a selection ON/OFF
- (11) **Heating target** - Control the heating via air or floor sensor
- (12) **Heating limits** - Delicate floor coverings such as vinyl, carpet and laminate must be limited to 81°F. Tile floors can be set to a maximum of 104°F
- (13) **Tariff setting** - Select the tariff you are on with your energy provider and enter cost per kWh
- (14) **Program setting** - Select a preset program, set a fixed temperature or set your own custom program
- (15) **Setback temperature** - The setback temperature is the temperature you set for periods where you would like a lower temperature or no heating

NOTE: when the reset has been pressed, the time for reset will need 2 ~ 5 seconds.

SCHEDULING

With your 4iE, you can choose to set a custom heating schedule, fixed temperature or a preset program designed for different rooms.

To adjust the program, you must highlight the days that you want to program by pressing them, then press **Program**. You can select multiple days in any combination, such as weekdays only, to program separate weekday and weekend temperatures. To do this, program all the weekdays at once and then program the weekend when you're finished.

The programming works by setting Comfort Periods of warm temperatures, shown with a green line. Any time not covered by a Comfort Period will use a lower Setback temperature to save energy. The default setback temperature is 61°F and you can change this once you've set up your program if needed.

You can add up to 5 Comfort Periods per day and when you've set what you want, just press **Done**. You'll see the summary of your program which you can edit by repeating the steps above, or just press **Accept** to set your program.

TECHNICAL SPECIFICATIONS

| | |
|---------------------------|--|
| Supply Voltage | 120-240V, AC +10% / -15%, 60Hz |
| Maximum Switch Load | 15A Note: This product is not designed to be used with any inductive load |
| GFCI | Class A GFCI with 5mA trip level |
| Temperature Display Range | +32°F to 122°F (0°C to +50°C) |
| Operating Temperature | +32°F to 104°F (0°C to 40°C) |
| Storage Temperature | -4°F to 140°F (-20°C to +60°C) |
| Dimensions | 90 x 120 x 21.7mm (2-3/4" deep double gang box recommended) |
| Floor Sensor Type | NTC (10K) |

GROUND FAULT CIRCUIT INTERRUPTER (GFCI)

GFCI Notice

The GFCI feature is used to detect any leakage of current from your heating system. During a ground fault the two lines of the load will be cut off. Once your thermostat is installed and connected to a power supply you can test the GFCI function by increasing the set temperature until heating is on - the heating up icon (▲) will be illuminated - and pressing the "TEST" button. If your test is successful you will see the GROUND FAULT screen and you will need to hold "cancel" for 3 seconds in order to restore heating operation.

However if the thermostat detects that one of the relays has FAILED to open correctly you will see the CONTROL FAULT screen and the TEST LED will illuminate. In the following circumstances you should immediately isolate the power supply to the thermostat and contact Warmup customer service:

1. Press the TEST button when heating is on (the heating up icon (▲) will be illuminated) and the screen does not display GROUND FAULT or cut power to the load.
2. The thermostat shows the GROUND FAULT screen during normal operation.
3. The thermostat shows the CONTROL FAULT screen.

Note: The GFCI test should be carried out monthly.

IMPORTANT NOTICES

FCC Notice

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.


Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio TV technician for help.


Caution: To maintain compliance with the RF exposure guidelines, place the unit at least 20cm from nearby persons.

INSTALLATION

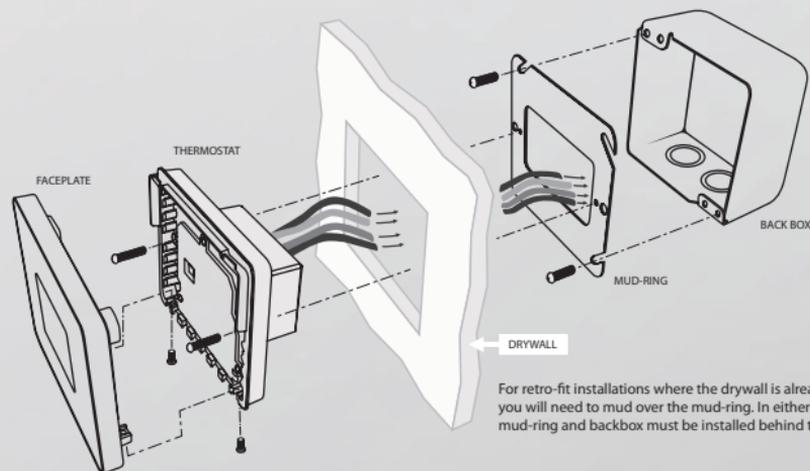

ELECTRICAL WIRING

NOTE: All cables and connections must be carried out by a qualified electrician and must conform to the local electrical code. Conduits are only required where it is mandated by state or provincial code. Please refer to local electrical code for compliant applications.

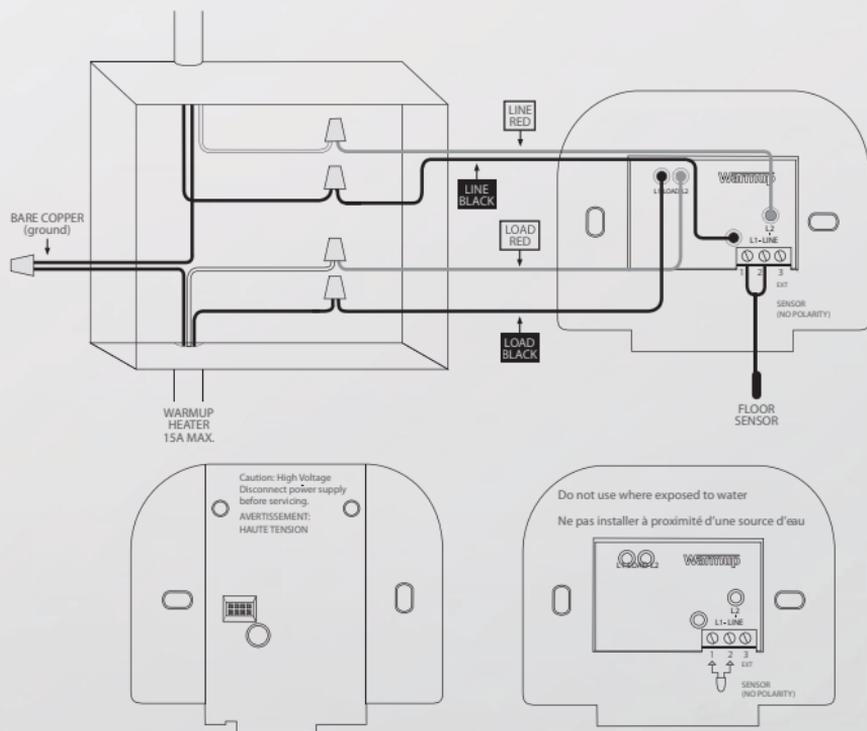

Contact Us

US

+1 (888) 927-6333

52 Federal Road Unit 1F
Danbury, CT
06810

CANADA

+ 1 (888) 592-7687

374 Wellington St W
Toronto
Ontario
ON M5V 1E3

Warranty

Warmup plc warrants this product, to be free from defects in the workmanship or materials, under normal use and service, for a period of three (3) years from the date of purchase by the consumer. If at any time during the warranty period the product is determined to be defective, Warmup shall repair or replace it, at Warmup's option. If the product is defective, please either,

- (i) return it, with a bill of sale or other dated proof of purchase, to the place from which you purchased it, or
- (ii) contact Warmup. Warmup will determine whether the product should be returned, or replaced.

This warranty does not cover removal or reinstallation costs, and shall not apply if it is shown by Warmup that the defect or malfunction was caused by failure to follow the instruction manuals, incorrect installation or damage which occurred while the product was in the possession of a consumer.

Warmup's sole responsibility shall be to repair or replace the product within the terms stated above. WARMUP SHALL NOT BE LIABLE FOR ANY LOSS OR DAMAGE OF ANY KIND, INCLUDING ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING, DIRECTLY OR INDIRECTLY, FROM ANY BREACH OF ANY WARRANTY, EXPRESS OR IMPLIED, OR ANY OTHER FAILURE OF THIS PRODUCT. THIS WARRANTY IS THE ONLY EXPRESS WARRANTY WARMUP MAKES ON THIS PRODUCT. THE DURATION OF ANY IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, IS HEREBY LIMITED TO THE THREE-YEAR DURATION OF THIS WARRANTY.

This Warranty does not affect your statutory rights.

Please register your Warmup product at: www.warmup.com (US) or www.warmup.ca (CANADA)