Warmup

The world's **best-selling** floor heating brand™

Features & Benefits

- 5ihca Uh]WWZbhfc`UbX`dck Yf`X]ghf]Vih]cb`Zcf`XY]M]b[`UbX`gbck`a Y`h]b[
- ±bhY[fUhYX`Y`YWfcb]WWZbhfc``Yf`k]h`VUW_`]h`@78`X]gd`Um
- I gYf'Zf]YbX`m]bhYfZUW
- I d]hc`)`ncbYg`UWj`jUh]cb
- ±bhYfZUW`hc`6"A"G`UbX`Ga UfH<ca Y`i g]b[`657B9H UbX`A C86I G`cjYf`FG(,)`Wca a i b]WUh]cb`k]fYg
- GYei YbW]b[`cdh]cb`VYhk YYb`hY`ncbYg`i`5`ck]b[`Uf[Yf`gbck`a Y`h]b[`UfYU`k]h``Ygg`UjU`UV`Y`dck Yf`cb`g]hY
- A u`h]d`Y`gbck`gYbcf`g]bdih`g`i`cdh]cbU`k]h`5Yf]U`ž; fci bXž'utYf`cf`'dXUfhm]bdih'
- A UghYf#G`UjY`WUdUV]`]hm]i`WcbbYWh]cb`Zcf`gYjYfU`DMFC6CL`i b]hg`hc`k`cf`]c[YhvYf

- 7f]h]WU`ncbYg`gYhh]b[g`i`h`YgY`UfYUg`k]``VY`YUhYX`k`YbYjYf`]h]g`gbck]b[`k]`ch`Yf`ncbYg`k]``ghU[[Yf
- I d]hc`*$$5/*$$J`ci hdi hg`hc`YUhYfg
- ±bhY[fUhYX`UX`ghUV]`; fci bX`:Ui`h`gYbgcf
- 5X`ghUV`Y`Yfa`dYfUhi fY`gYhdc]bhž`I ddYf`UbX`@ck Yf`@a]hY`dYfUhi fY
- 5X`ghUV`Y`<`X`#`b#`C:::`8Y`UmUbX`A Ugu U``Cb
- 5X`ghUV`Y`gd`]hh]b[`h]a Y`VYhk YYb`hY`ncbYg`HYWb]Y``UUb`hYgh]b[`k#`WUa a ]gg]cb]b[`a ccXY`Zcf`YUgm`UbX`ZUghgmghYa`hYgh]a Y`gUf]b[`cf`j`b`Xuf]b[`gi a a Yf`cf`Uh`\][\`h`a dYfUhi fYg±
- 9bYf[m`ZfyWbhUc`c]h`a
- 9H@`WJh]Z]WUh]cb

PYROBOX5/19

POWER

GROUND FAULT RESET

Warmup

The world's **best-selling** floor heating brand™

The world's best-selling floor heating brand™
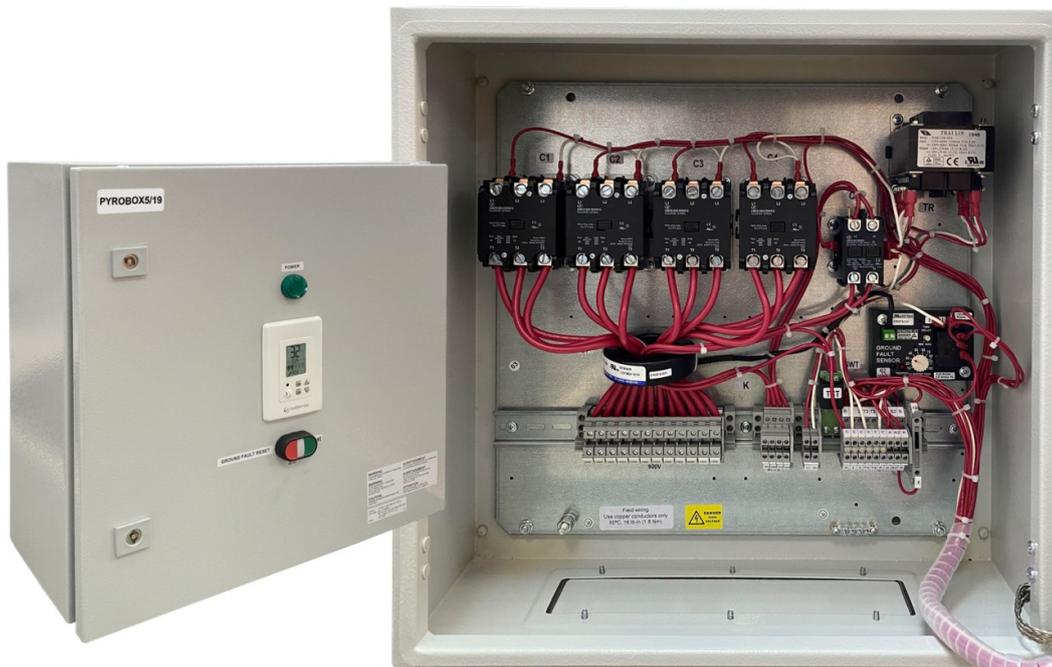
Description

H\Y`7CA 6CL#%- `]g`U`"D`i [ `UbX`D`Um´`Wdbhfc``YX`dck Yf`X]ghf]Vi h]cb`dUbY``Zcf`Zcgh`dfchYW]cb`ž]W`UbX`gbck `a Y`h]b[ `Udd`]WUh]cbg`"

+h]g`Yei `]ddYX`k`]h\`Vi ]`H]`b`Wda a ib]WUh]cb`]bhYfZUW`hc`6i`]X]b[`A UbU[Ya Ybh`GmghYa a `f6"A "G"cf`6"5"G"ŁUbX`Ga UfH`<ca Y`Udd`]WUh]cbg`i g]b[`FG(,) `WbbYW]cb`Vm657B9HUbX`A C86I G`dfchcWc`g`"

K \Yb`fYW`]j`]b[ `U`g][bU`Zfca `h\Y`gbck `gYbgcf#g]`]h]UW]jUhYg`h\Y`WbhUWcfg`YbYf[]n]b[ `h\Y`\YUh]b[ `Y`Ya Ybhg`"6UgYX`cb`h\Y`8-Đ`gk]h\W`g`Wbz][uUh]cbžh\Y`ncbYg`UfY`UWj]jUhYX`Y]h\Yf`Wbh]bi ci gmcf`]b`Wghca ]nYX`gYi b]]b`h\Y`VYk YYb`h\Y`ncbYg`"

H\Y`ci hXccf`h\Yma dYfUhi fY`gYHdc]bhUg`k`Ug`[fci bX`i ddYf``]a ]h\Ya dYfUhi fY`UbX`Ua V]YbhW`k Yf``]a]h\Ya dYfUhi fY`UbX`Va VYcYfYUg]`mgYh`h\Y`HYWb]WUb`GYHh]b[g`a cdY`U`cdk g`gghU`Yf`cf`hYWb]WUb`hc`UX`i gh`h\Y`dUfUa YhYfg`Zcf`WghcaY]nYX`]bghU`Uh]cbg`"

The parameters that can be modified are as follow:

- H\Ya dYfUhi fY`gYHdc]bh
- @ck Yf`Ua V]Ybhhha dYfUhi fY``]a]h
- GUV`i ddYf`Hma dYfUhi fY`@]a ]hhc`XYUWj]jUhY`\YUhfg`Zcf`9bYf[m9ZZ]W]Ybh
- H]a Y`XY` Umfk`c`X!cbŁVYZcfY`XYUWj]jUh]cb`h\Y`\YUhYfg
- CB`h]a Y`Zcf`A Ubi U`a cXY
- <YUhYfg`WdWh]ma Y`#`Gd`]hh]b[`h]a Y`VYk YYb`ncbYg
- Bi a VYf`cZ`ncbYg`UbX`gYi b`VW`cZ`cdYfUh]cb`fGYbgcfg`UbX`\YUhYfg`Wdbhfc``c[ ]Ł

H\Y`7CA 6CL#%- `]i]`H]`b`; fci bX`:Ui`h`bhYf*i dhcf`U`ck g`gYHh]b[ `g`Zcf`h\Y`hf]dd]b[ `WffYbh`VYk YYb`$"$%`ï `$"%5"`H\Y`; : 9D`UX`1 ghUV`Y`h]a Y`XY`Umdfcj]XYg`U`g]a d`Y`UbX`gUZY`dfchYWj]cb`Zca `bi]gUbW`hf]dd]b["

8-Đ`Gk ]hW\Yg`cWUhYX`cb`h\Y`Wbhfc`Yf`dfcj]XY`YUgmUWWgghc`hY`Wb]W`Ui`a cdY`UbX`hc`h\Y`gmghY`a `Wbz][i fUh]cb`gYHh]b[ g`"

H\Y`7CA 6CL#%- `U`ck g`gbck `gYbgcfg`]bdi h`Vch\`Zca `h\Y`DFC`Gbck `gYbgcfg`fUFYfŁUž][ fci bX`UbX`[ i hhYf`i gYdUfUhY`mcf`Ubm`Wda V]bUj]cb`VYk YYb`h\Ya Ł`UbX`U`gc`Zca `U``fdUfhmgYbgcf`cf`]bdi h`"

+bghU``]b[ `h\Y`gmghYa `]g`U`ei ]W\`UbX`YUgmUUg_"`5dUfh`cZ`a ci bh]b[ `h\Y`a YHU`Vc`]`hc`h\Y`k U`žh\Y`]bghU``Yf`bYYXg`cb`mhc`WbbYWh\Y`]bY`]b`UbX`]bY`ci hk ]fYg`]b`h\Y`a Uf_YX`hYfa]bU`g`UbX`h\Y`gmghYa `]g`fYUXmhc`k cf_"

- Gbck `gYbgcf`F<`gYbg]h]j]hm
- Gbck `XYhYWj]cb`h\fYg\c`X
- Bi a VYf`cZ`gbck `gYbgcfg`Wbbitcb YXXhYX
- 7f]h]W`a ncbYg`gYHh]b[
- A UghYf`UbX`g`Uj Y`gYHh]b[g`]Za cfY`h\Ub`cbY`DM`7C6CL`]g`i gYX
- A 57`5XXfYgg`Zcf`h\Y`A C86I G`UbX`657B9H`Wda a i b]WUh]cb

The world's best-selling floor heating brand™

General system layout
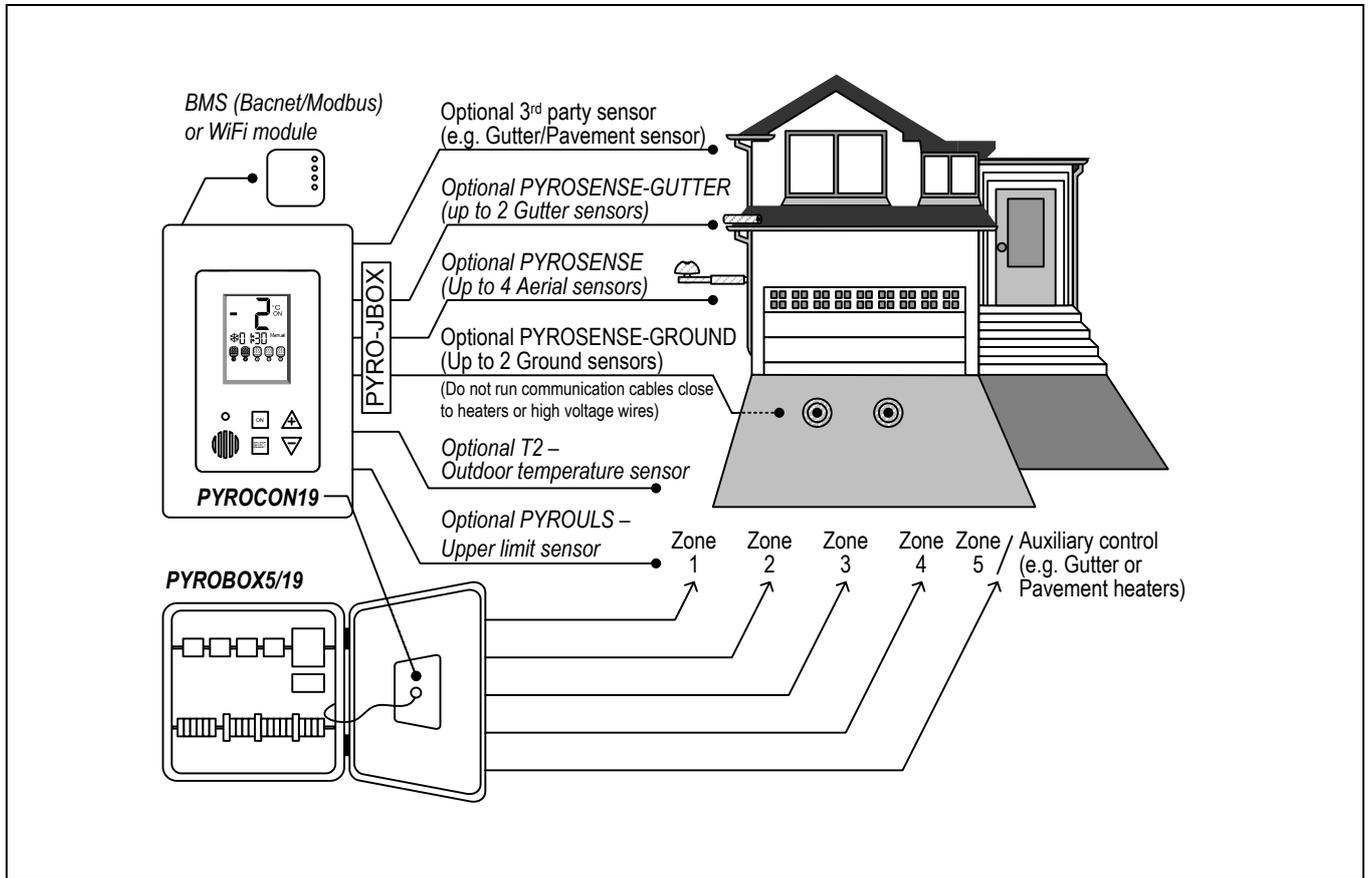
Technical specifications

Approvals	ETL Listed CAN/CSA-C22.2 No. 14 | UL-508A	**Manual Reset GFEP**	Push button on Front Panel
		Four Satellite Contactors	600 VACS, 50 A Max (Resistive), 50/60 Hz, 3-Poles
Enclosure Protection	IP20, Indoor Mounting		
Dimensions	18x18x8 inch (50x50x25 cm)	**One Satellite Contactor**	277 VAC, 30 A Max (Resistive), 50/60 Hz, 1-Pole
Ground Fault Equipment Protection GFEP	Adjustable trip current 0.1-1 A (default 0.2A) Adjustable time delay 0.1-1 sec. (default 0.1 sec.)		600 VAC / 50 A per pole
		Terminal blocks	6 mm^2 ,10 AWG (max)

Wiring diagram
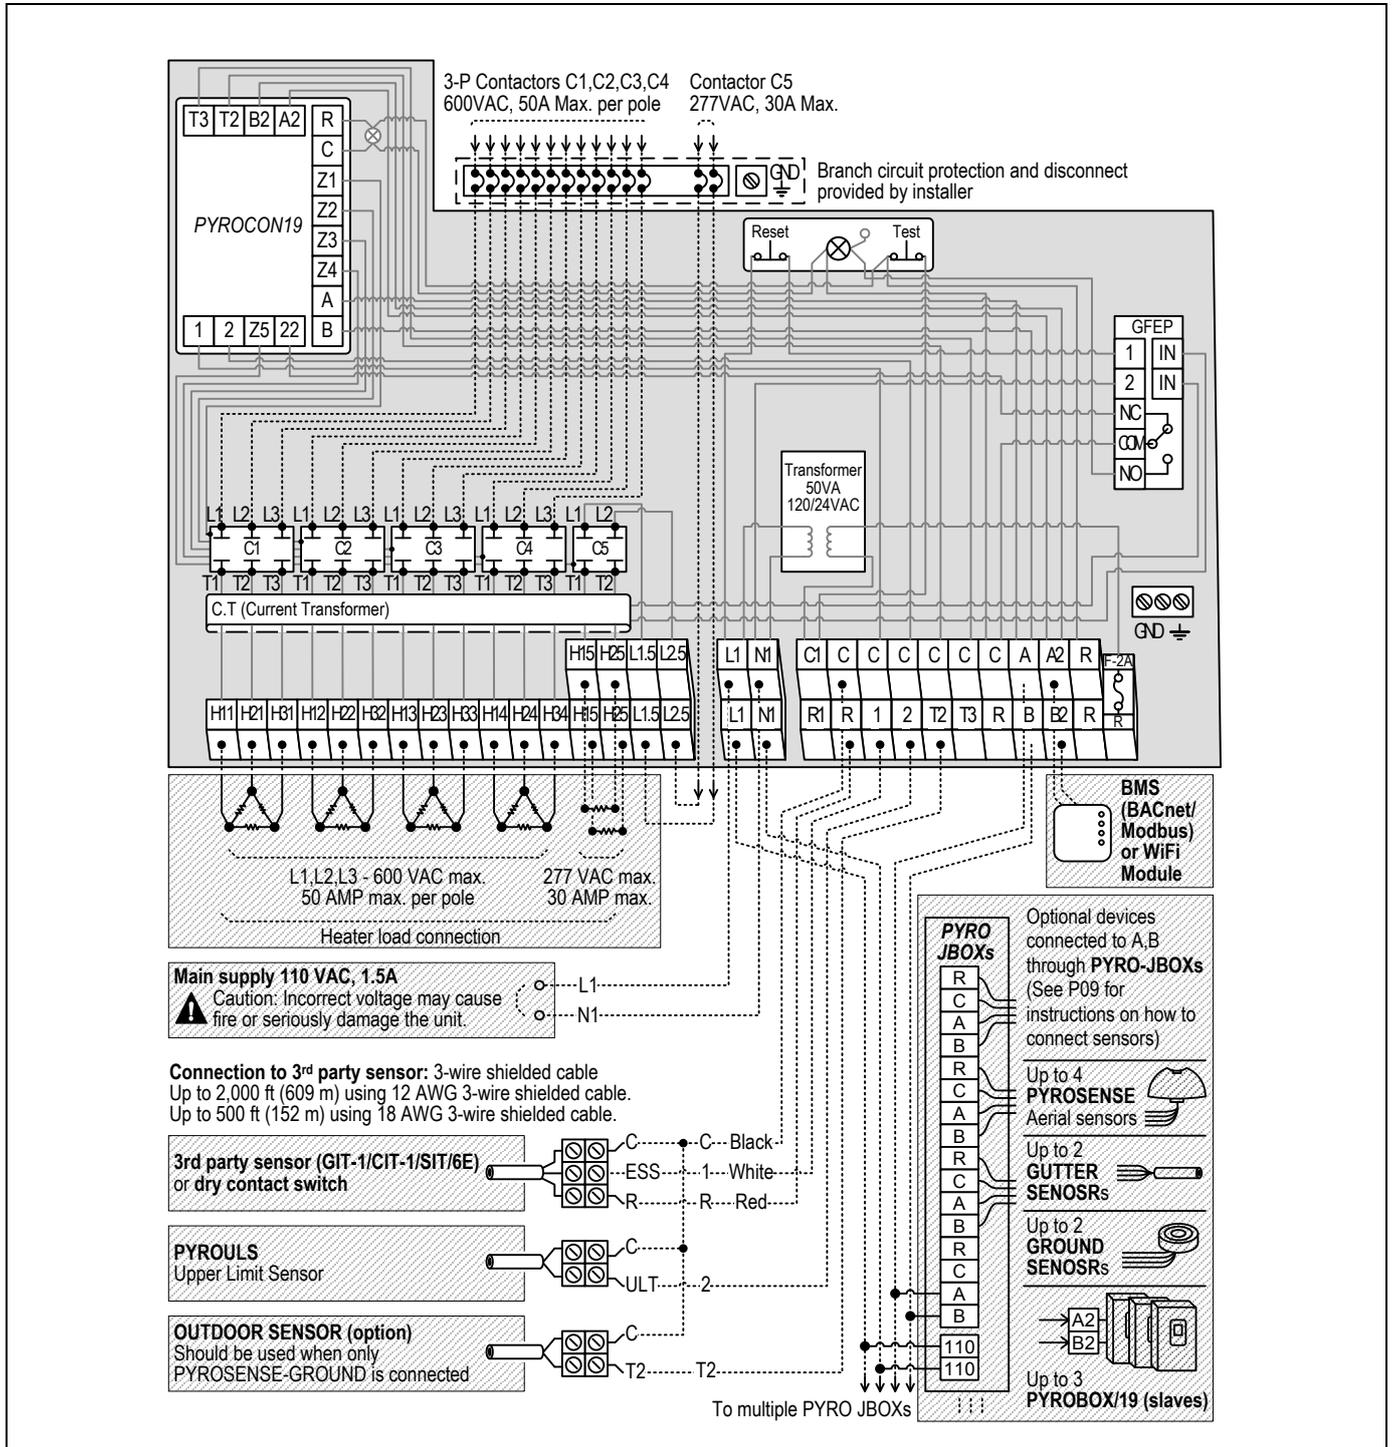
For further information, operating & installation manual, please refer to our website at www.Warmup.com