


GENERAL SYSTEM LAYOUT

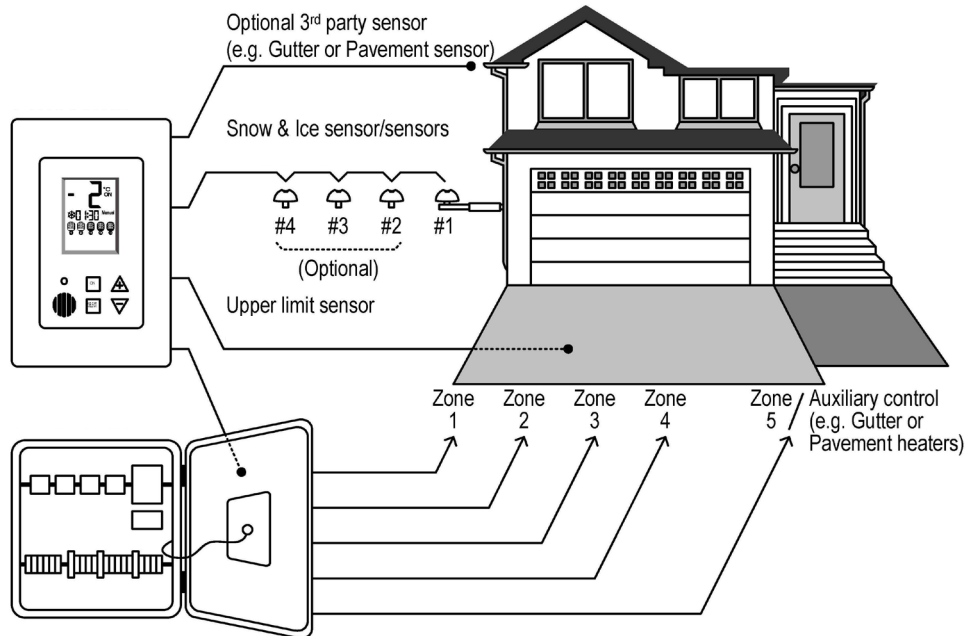

TECHNICAL SPECIFICATIONS

Approvals	ETL Listed CAN/CSA-C22.2 No. 14 UL-508A	Manual Reset GFS	Push button on Front Panel
Enclosure Protection	IP20, Indoor Mounting	Four Satellite	600 VACS, 50 A Max
Dimensions	18x18x8 inch (50x50x25 cm)	Contactors	(Resistive), 50/60 Hz, 3-Poles
Ground Fault	Adjustable trip current 0.1-1 A	One Satellite	277 VAC, 30 A Max (Resistive),
Equipment Protection	(default 0.2A)	Contactor	50/60 Hz, 1-Pole 600 VAC / 50 A per pole
GFS	Adjustable time delay 0.1-1 sec. (default 0.1 sec.)	Terminal blocks	6 mm2 ,10 AWG (max)

RELATED PRODUCTS

- CIT1 - see WSC-1104
- GIT1 - see WSC-1204
- SIT6E - see WSC-1304
- APS3C - see WSC-1404
- AIRsense - see WSC-0205