


PRODUCT CODE

- NADCM-M-80 (sheets)
- NADCM-M-150 (rolls)

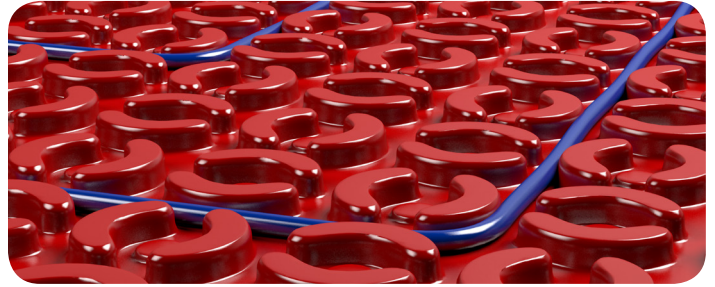

PRODUCT DESCRIPTION

The TCNA-tested DCM-PRO anti-fracture Membrane can be installed on wood and cement subfloors using any tile adhesive. The patented DCM-PRO design allows for more adhesive to connect with the cable thereby distributing the heat more evenly. There is no waiting required after installation so you can begin laying the flooring immediately. The DCM-PRO Membrane is ready to tile.


Installers can use either modified or unmodified adhesives over the membrane to suit their installation needs. The DCM-PRO Membrane can even be covered with self-levelling mortars (SLU's) to allow installation of small format tiles and other floor types such as glue-down wood and LVT's, to be laid on top of the DCM-PRO System. The unique design of the DCM-PRO Membrane protects the cable from installation damage leading to a reduced risk of cable failures.

The membrane has been successfully tested to ANSI 118.12 standards and performed well on the Robinson test (ASTM C-627). **It is the highest-rated membrane for floor heating systems.**

FEATURES

- Under 6mm – 1/4" thick
- Rated as Anti-Fracture membrane as tested by the TCNA against ASTM 118-12
- Installs with regular or modified thinsets
- Ready to tile over
- Use any adhesives or SLU's on top for flooring installations
- Highest heating outputs with DCM-PRO Cable
- Lowest running costs with 1/4" Warmup Insulation Boards (WSC-0725)
- Smart operation with 4iE-04 Smart WiFi Thermostat (WSC-0926)

APPLICATION

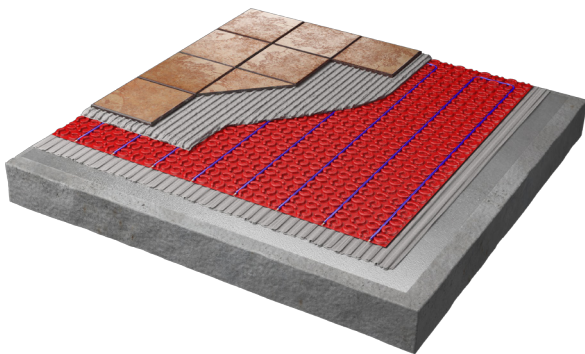

The DCM-PRO Membrane can be installed using modified thin set over plywood and concrete subfloors. Warmup DCM-PRO Cable can be installed at 3 or 4 pegs to achieve the desired heat output. See following chart.

PRODUCTS LISTING AND CABLE SPACING

Installation Membrane

Code	Description	Dimensions
NADCM-M-150	Roll of Membrane, covers 150 sqft.	46'7" x 3'3"
NADCM-M-80	Box of 10 sheets, covers 81.6sqft.	2'6-5/16" x 3'3"

Cable spacing

	PRODUCT CODE	Cable length (ft)	Amps	DCM-PRO Membrane		Loose laid cable w/ spacers	
				3 pegs	4 pegs	3"	4"
120 Volt	NADCM-C-120-65	16.7	0.5	5	7	4	6
	NADCM-C-120-130	33.1	1.1	10	13	8	11
	NADCM-C-120-195	49.9	1.6	15	20	12	17
	NADCM-C-120-260	66.3	2.2	20	27	17	22
	NADCM-C-120-325	83.0	2.7	25	33	21	28
	NADCM-C-120-390	99.4	3.3	30	40	25	33
	NADCM-C-120-525	132.9	4.4	40	53	33	44
	NADCM-C-120-655	166.0	5.5	50	67	42	55
	NADCM-C-120-785	199.1	6.5	60	80	50	66
	NADCM-C-120-920	232.3	7.7	70	93	58	77
	NADCM-C-120-1050	265.4	8.8	80	107	66	88
	NADCM-C-120-1180	298.6	9.8	90	120	75	100
	NADCM-C-120-1315	331.7	11.0	100	133	83	111
	NADCM-C-120-1445	364.8	12.0	110	147	91	122
	NADCM-C-120-1575	398.0	13.1	120	160	99	133
240 Volt	NADCM-C-240-325	83.0	1.4	25	33	21	28
	NADCM-C-240-390	99.4	1.6	30	40	25	33
	NADCM-C-240-525	132.9	2.2	40	53	33	44
	NADCM-C-240-655	166.0	2.8	50	67	42	55
	NADCM-C-240-785	199.1	3.3	60	80	50	66
	NADCM-C-240-920	232.3	3.9	70	93	58	77
	NADCM-C-240-1050	265.4	4.5	80	107	66	88
	NADCM-C-240-1180	298.6	5.0	90	120	75	100
	NADCM-C-240-1310	331.7	5.6	100	133	83	111
	NADCM-C-240-1640	414.7	7.0	125	167	104	138
	NADCM-C-240-1970	497.7	8.4	150	200	124	166
	NADCM-C-240-2300	580.7	9.8	175	233	145	194
	NADCM-C-240-2630	663.4	11.2	200	266	166	221
	NADCM-C-240-2955	746.4	12.6	225	300	187	249
	NADCM-C-240-3240	829.4	13.5	250	333	207	276



The world's **best-selling** electric floor heating brand™

ANTI-FRACTURE MEMBRANE FOR DCM-PRO CABLE SUBMITTAL SHEET WSC-1026

WARRANTY & MAINTENANCE

When installed according to the installation manual, the DCM-PRO System (DCM-PRO Cable + DCM-PRO Membrane) is covered with Warmup's 30-year manufacturer warranty.

TECHNICAL SUPPORT

Warmup is available 24/7/365 at (888) 927-6333.

For quotes, layouts and specific technical information, contact us at:

Warmup USA
(888) 927-6333
us@warmup.com

Warmup CANADA
(888) 592-7687
ca@warmup.com

RELATED PRODUCTS

- DCM-PRO Cable - see WSC-0816
- Insulation boards - see WSC-0725
- 4iE® Smart WiFi Thermostat - see WSC-0926

