


Roof Clips [SR-ROOF-CLIP]

For use with Warmup WSR Self-Regulating Cable

[Non-hazardous Locations]

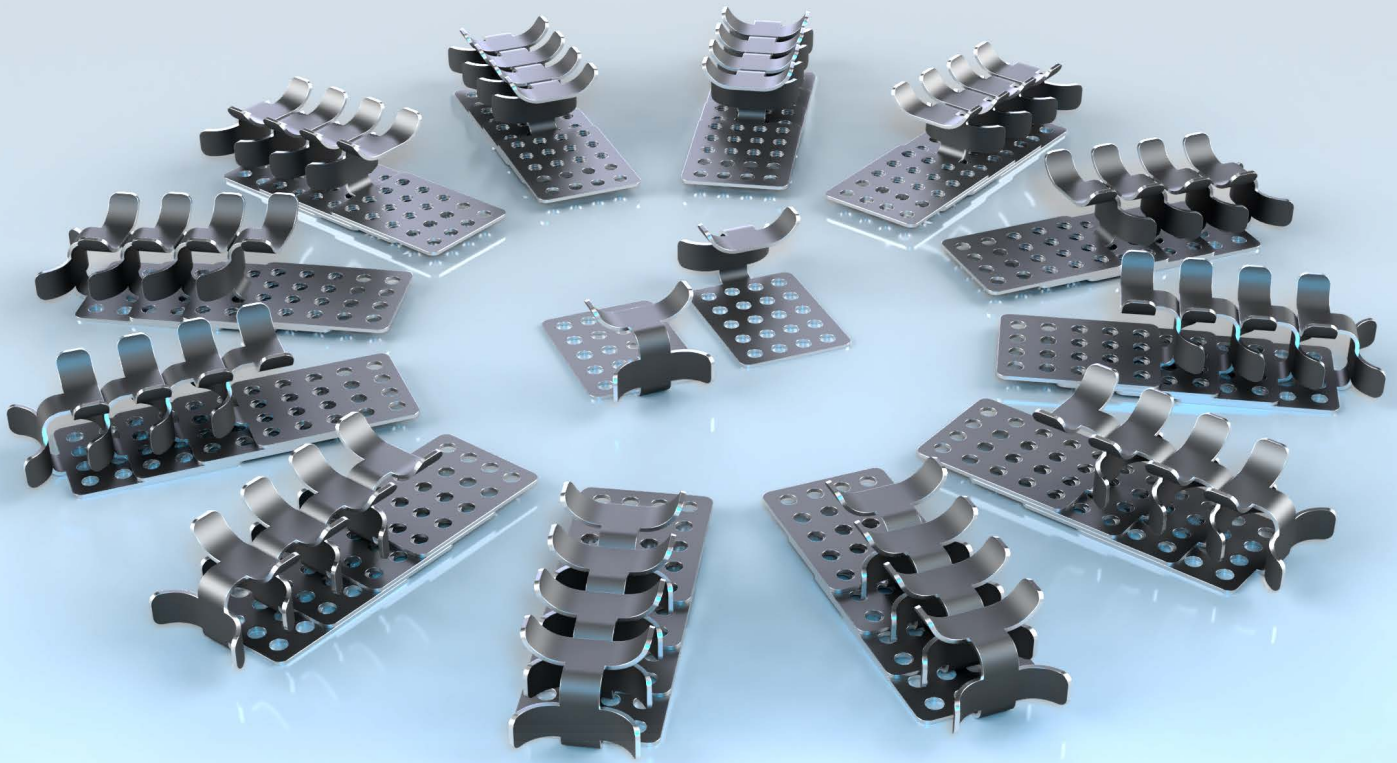

Secure Cable Fastening

Designed specifically to hold Warmup's WSR Self-Regulating Cable firmly in place on roofs and gutter applications.

Versatile Installation Options

Can be installed using nails, screws, or a suitable outdoor adhesive for flexibility in different roof types e.g. shingle, metal seam roofs and gutters.

Durable Construction

Made from robust anodized aluminium to withstand outdoor conditions, ensuring long-term reliability in harsh weather.

cSAus Certified


Guarantees compliance when used with WSR cable.

Overview

Warmup's Roof Clips are used for fast and secure installation of Warmup's WSR Self-Regulating Cable in roof & gutter applications. The Roof Clips are used to secure the cables to variety of roof & gutter types such as shingle and metal seam roofs and gutters. The clips can be installed using either nails/screws or a suitable outdoor adhesive. The SR-ROOF-CLIP pack contains 50 roof clip pieces.

The Roof Clips are cSAus approved for non-hazardous locations only when used with Warmup's WSR Self-Regulating Cable. To maintain cSAus compliance, only Warmup approved accessories may be used with WSR Self-Regulating Cable. Refer to the Part Numbers page for guidance.

Dimensions

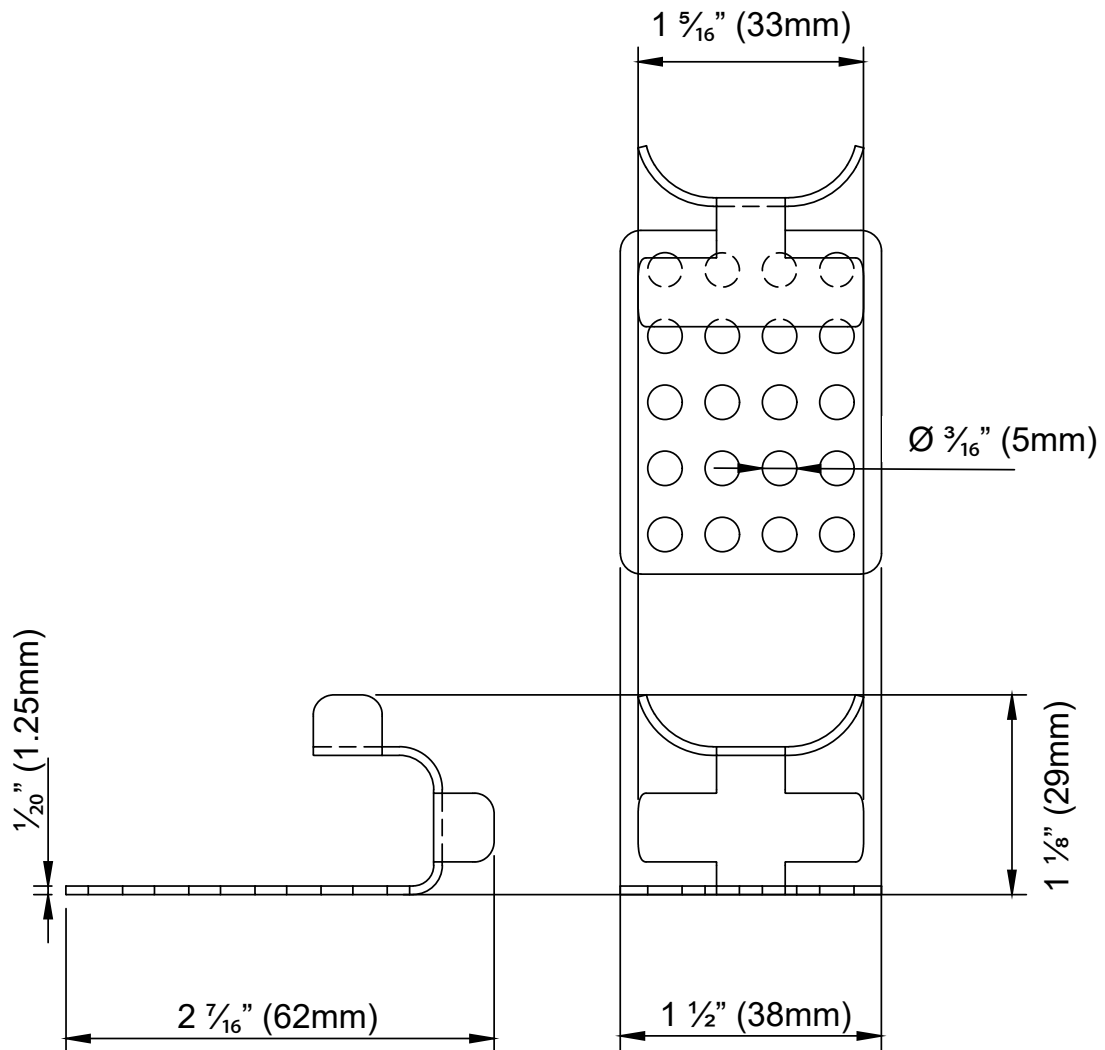

Part Numbers

WSR Self-Regulating Cable

Model	Code	Voltage	Cable Length	Power Output W/ft @ 10°C; (0°C Water)
WSR-5W-1-250-CR	WSR-5/9W-1-250-CR	110-120 VAC	250 ft	5 W/ft (9 W/ft)
WSR-5W-1-500-CR	WSR-5/9W-1-500-CR	110-120 VAC	500 ft	5 W/ft (9 W/ft)
WSR-5W-1-1000-CR	WSR-5/9W-1-1000-CR	110-120 VAC	1000 ft	5 W/ft (9 W/ft)
WSR-5W-2-250-CR	WSR-5/9W-2-250-CR	208-277 VAC	250 ft	5 W/ft (9 W/ft)
WSR-5W-2-500-CR	WSR-5/9W-2-500-CR	208-277 VAC	500 ft	5 W/ft (9 W/ft)
WSR-5W-2-1000-CR	WSR-5/9W-2-1000-CR	208-277 VAC	1000 ft	5 W/ft (9 W/ft)
WSR-8W-1-250-CR	WSR-8/12W-1-250-CR	110-120 VAC	250 ft	8 W/ft (12 W/ft)
WSR-8W-1-500-CR	WSR-8/12W-1-500-CR	110-120 VAC	500 ft	8 W/ft (12 W/ft)
WSR-8W-1-1000-CR	WSR-8/12W-1-1000-CR	110-120 VAC	1000 ft	8 W/ft (12 W/ft)
WSR-8W-2-250-CR	WSR-8/12W-2-250-CR	208-277 VAC	250 ft	8 W/ft (12 W/ft)
WSR-8W-2-500-CR	WSR-8/12W-2-500-CR	208-277 VAC	500 ft	8 W/ft (12 W/ft)
WSR-8W-2-1000-CR	WSR-8/12W-2-1000-CR	208-277 VAC	1000 ft	8 W/ft (12 W/ft)
WSR-10W-1-250-CR	WSR-10/15W-1-250-CR	110-120 VAC	250 ft	10 W/ft (15 W/ft)
WSR-10W-1-500-CR	WSR-10/15W-1-500-CR	110-120 VAC	500 ft	10 W/ft (15 W/ft)
WSR-10W-1-1000-CR	WSR-10/15W-1-1000-CR	110-120 VAC	1000 ft	10 W/ft (15 W/ft)
WSR-10W-2-250-CR	WSR-10/15W-2-250-CR	208-277 VAC	250 ft	10 W/ft (15 W/ft)
WSR-10W-2-500-CR	WSR-10/15W-2-500-CR	208-277 VAC	500 ft	10 W/ft (15 W/ft)
WSR-10W-2-1000-CR	WSR-10/15W-2-1000-CR	208-277 VAC	1000 ft	10 W/ft (15 W/ft)

WSR Approved Accessories

Model	Description	Classification	Application
SR-SFIT-BOX-S	Power Connection Box for connecting WSR to supply	Non-Hazardous & Hazardous Locations <i>Ex eb IIC T3 Gb, Ex tb IIIC T200°C Db Class I, Zone 1, AEx eb IIC T3 Gb Class II, Zone 21, AEx tb IIIC T200°C Db Class I, Division 2, Groups A, B, C and D T3 Class II, Division 2, Groups F, G T3</i>	<i>Pipe Tracing Roof & Gutter</i>
SR-SFIT-SPL	Splice Connection kit for In-line Splice of WSR cable		
SR-SFIT-TEE	Tee Splice Connection kit for Tee Splice of WSR cable		
SR-END-KIT	End-Seal Termination kit for WSR cable termination		
SR-LENDCAP	Lighted End Kit for WSR cable termination, giving visual indicator when WSR cable is active. Certified for use at 120 or 240V AC only.	Non-Hazardous & Hazardous Locations <i>Class I, Division 2, Groups A, B, C and D; Class II, Division 2, Groups F and G; Class III; T5 or T6</i>	<i>Pipe Tracing Roof & Gutter</i>
SR-POWER-KIT	Power Connection Kit for WSR cable, incl. components for 1 power connection, 1 termination. Incl. 1 pipe standoff bracket.	Non-Hazardous Locations	<i>Pipe Tracing Roof & Gutter</i>
CRDS-15-GFCI	Plug-in, ground-fault-circuit interrupter [GFCI] power connection kit with 5-15P type plug for Warmup's WSR 120V Self-Regulating Cable	Non-Hazardous Locations	<i>Pipe Tracing Roof & Gutter</i>
SR-SPLICE-KIT	Splice/Tee Kit for WSR cable. Incl. components for 1 Splice and 1 End Seal, or 1 Tee Connection and 1 End Seal	Non-Hazardous Locations	<i>Pipe Tracing Roof & Gutter</i>
SR-ROOF-CLIP(50/BAG)	Metal single roof clips (50/BAG) to secure WSR cable	Non-Hazardous Locations	<i>Roof & Gutter</i>
SR-HANGER-KIT	Downspout Hanger for WSR cable	Non-Hazardous Locations	<i>Roof & Gutter</i>

Contact

Warmup is available 24/7/365 at (888) 927-6333
For quotes, layouts and specific technical information contact us at:

Warmup Inc
www.warmup.com
us@warmup.com
T: +1 (888) 927-6333

25 Francis J Clarke Cir, Bethel,
CT 06801

Warmup Canada
www.warmup.com
ca@warmup.com
T: 1+ (888) 592-7687